




Router Serie Zyxel

Ver. 1.1 2010

## **CONFIGURAZIONE APPARATO SERVIZIO ADSL OLIMONTEL**

Collegamento Apparato  
Accesso pannello di controllo  
Verifica configurazione


Prima di procedere alla configurazione del Modem/Router ADSL verificare che i collegamenti alla linea telefonica sono corretti e che la spia sul pannello anteriore DSL/ADSL sia accesa di colore verde.

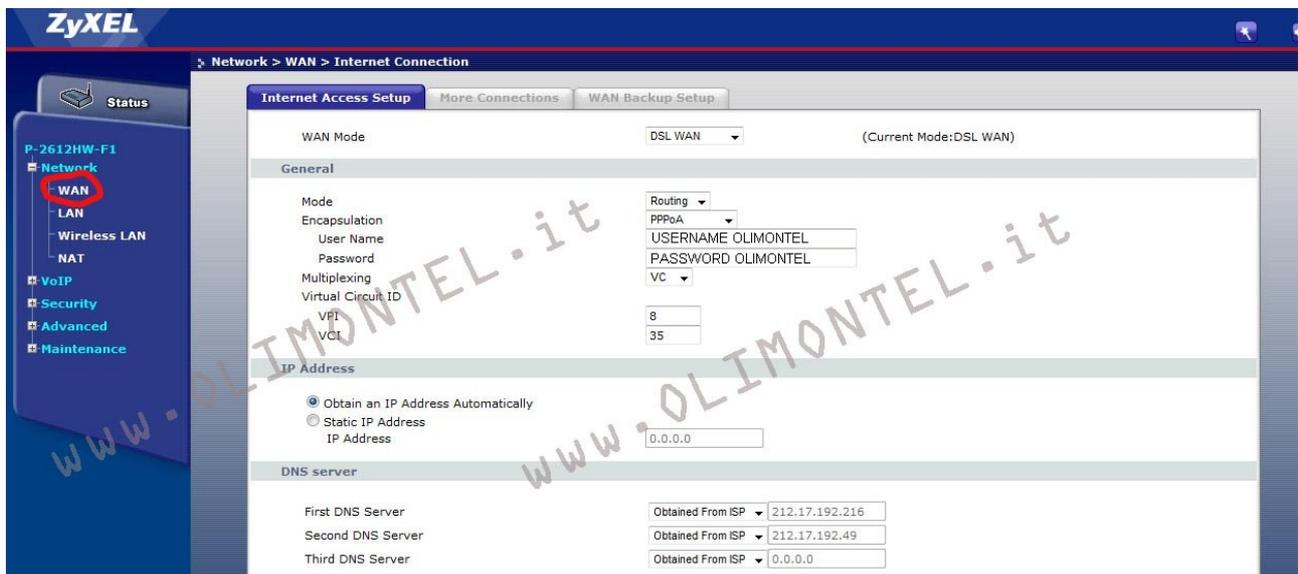

The screenshot shows the ZyXEL web interface for configuring the Internet Access Setup. The left sidebar shows the navigation menu with 'WAN' selected. The main content area is titled 'Internet Access Setup' and includes tabs for 'More Connections' and 'WAN Backup Setup'. The 'WAN Mode' is set to 'DSL WAN'. The 'General' section includes 'Mode' (Routing), 'Encapsulation' (PPPoA), 'User Name' (USERNAME OLIMONTEL), 'Password' (PASSWORD OLIMONTEL), 'Multiplexing' (VC), 'Virtual Circuit ID' (8), 'VPI' (8), and 'VCI' (35). The 'IP Address' section has 'Obtain an IP Address Automatically' selected. The 'DNS server' section has three servers: First DNS Server (212.17.192.216), Second DNS Server (212.17.192.49), and Third DNS Server (0.0.0.0).

Mode: Routing  
Encapsulation: PPPoA  
Multiplexing VC  
Virtual Circuit: 8 VPI / 35 VCI

Username : username adsl olimontel.it  
Password: password adsl olimonte.it

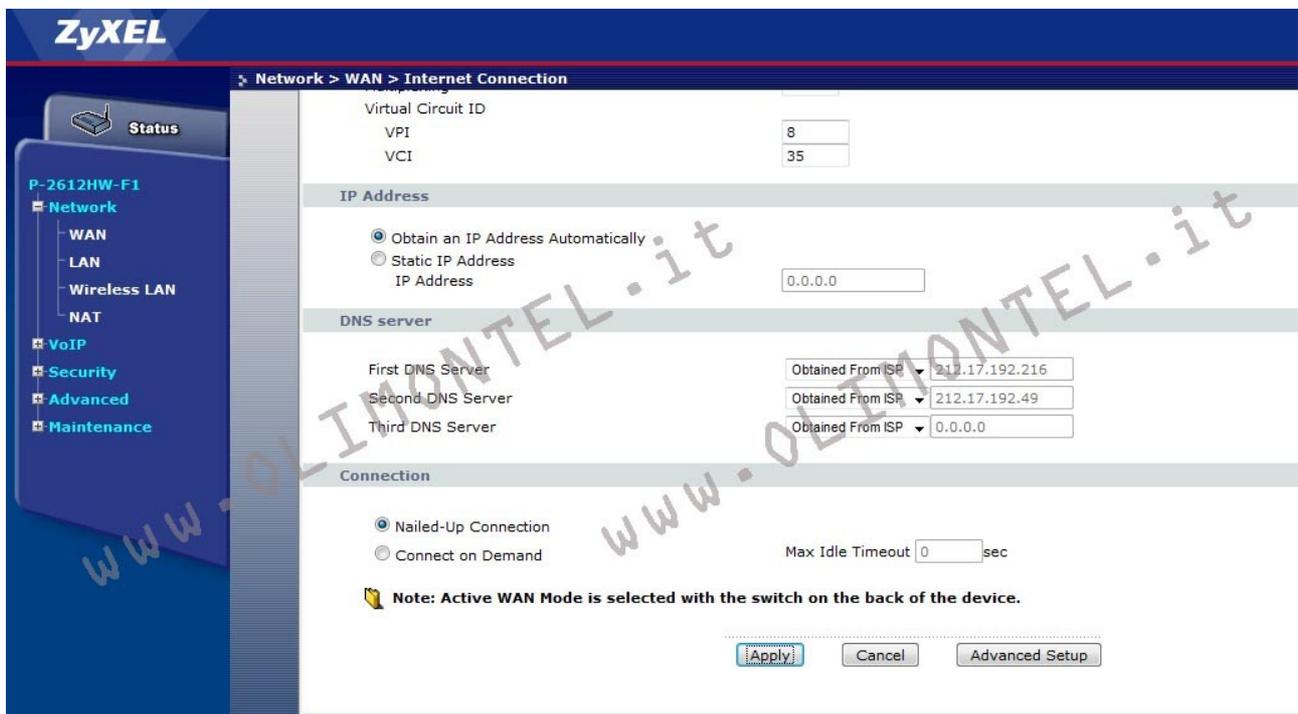

The screenshot shows the ZyXEL web interface for configuring the Internet Connection. The left sidebar shows the navigation menu with 'WAN' selected. The main content area is titled 'Internet Connection' and includes tabs for 'More Connections' and 'WAN Backup Setup'. The 'Virtual Circuit ID' is set to 8, 'VPI' is 8, and 'VCI' is 35. The 'IP Address' section has 'Obtain an IP Address Automatically' selected. The 'DNS server' section has three servers: First DNS Server (212.17.192.216), Second DNS Server (212.17.192.49), and Third DNS Server (0.0.0.0). The 'Connection' section has 'Nailed-Up Connection' selected and 'Max Idle Timeout' set to 0 sec. A note states: 'Note: Active WAN Mode is selected with the switch on the back of the device.' The bottom of the page has 'Apply', 'Cancel', and 'Advanced Setup' buttons.

Selezionare Nailed-up connection per avviare la connessione automaticamente.